

DESCRIPTION

- Chrome plated metal construction
- 1/2" IPS connections
- Includes head, arm, flange and diverter tub spout

OPERATION

- Dual control
- Small lever style handles
- Handles rotate toward spout to open

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) max.

CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel materials
- Accommodates either up or down feed installations

STANDARDS

- Third party certified by CSA to meet CSA B-125 and ASME A112.18.1M and all applicable requirements referenced therein

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

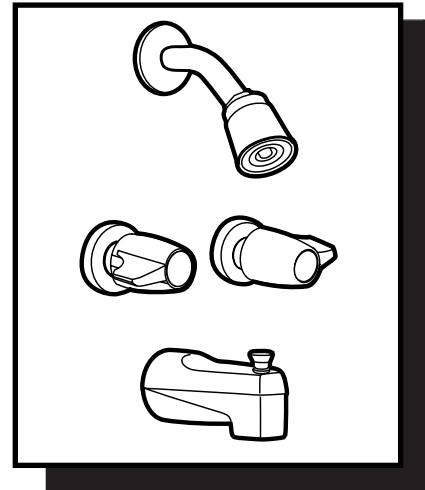

MOEN®
Two-Handle Tub/Shower Valve

Model: 82429

NOTE: See reverse side for illustrated parts

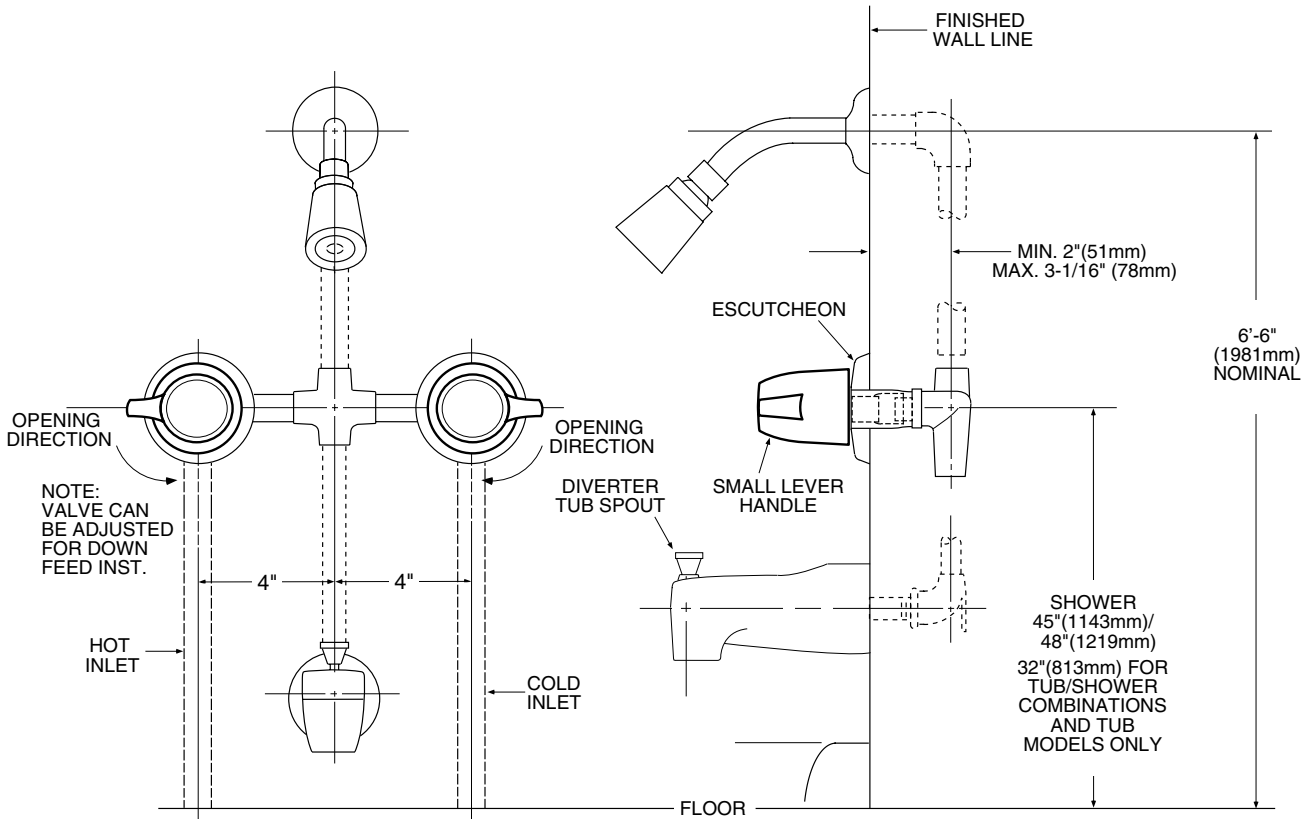

CRITICAL DIMENSIONS

(DO NOT SCALE)