Specifications

DESCRIPTION
- Chrome plated metal construction
- 1/2" IPS connections
- Includes adjustable showerhead, arm and flange

OPERATION
- Acrylic knob handle
- Pull-on/push-off design
- Allows control of both temperature selection and volume with a single handle

FLOW
- Showerhead is limited to 2.5 GPM

CARTRIDGE
- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS
- Third party certified by CSA to meet CSA B-125 and ASME A112.18.1M and all applicable specifications referenced therein

WARRANTY
- Warranted for two years against material or manufacturing defects
- Lifetime limited warranty against leaks and drips
- Decorative finishes are warranted for one year

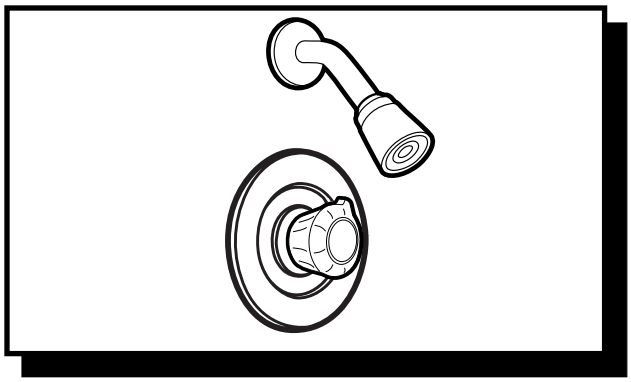

TOUCH CONTROL
Single-Handle Shower Valve

Model: 82505

NOTE: See reverse side for illustrated parts

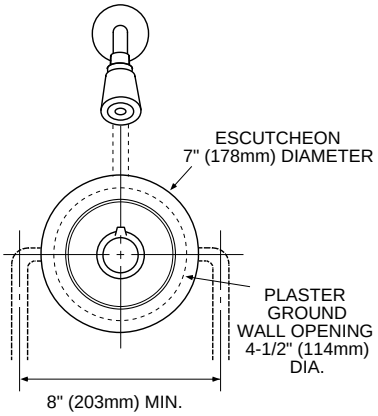

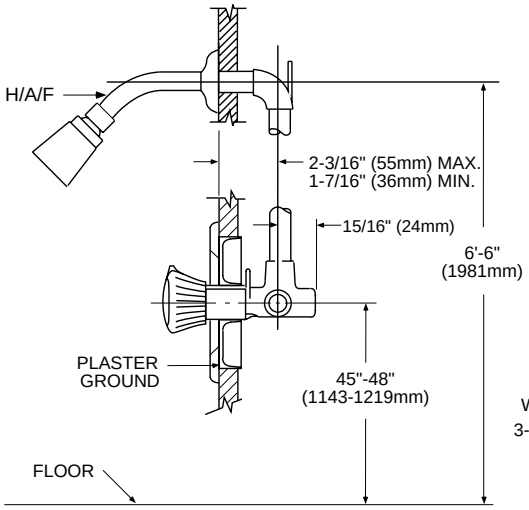

THICK WALL APPLICATION

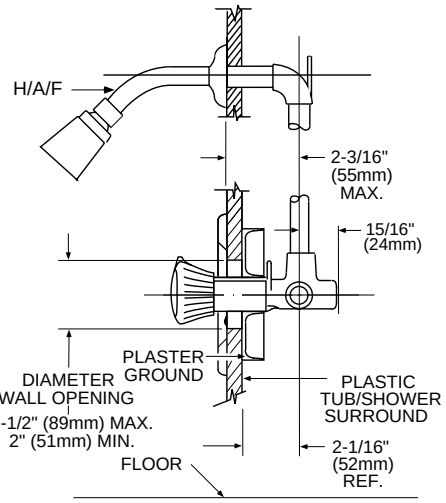

THIN WALL APPLICATION

CRITICAL DIMENSIONS

(DO NOT SCALE)