Specifications

FAUCET DESCRIPTION
- Chrome plated metal construction
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION
- Lever style handles with inserts
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)
- Operates with less than 5 lbs. of force

FLOW
- Aerator is limited to 2.2 gpm (8.3 L/min)

CARTRIDGE
- 1224 cartridge design
- Nonmetallic, non-ferrous and stainless steel material

STANDARDS
- Third party certified by CSA to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

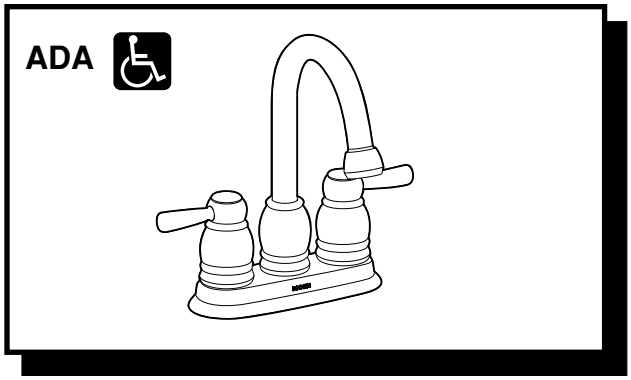

MOEN®
Two Handle Bar Faucet

Models: 85900

NOTE: See reverse side for illustrated parts

NOTE: DESIGNED TO INSTALL THRU 2 HOLES 1" (25mm) MIN. DIA. AND 4" (102mm) ON CENTER

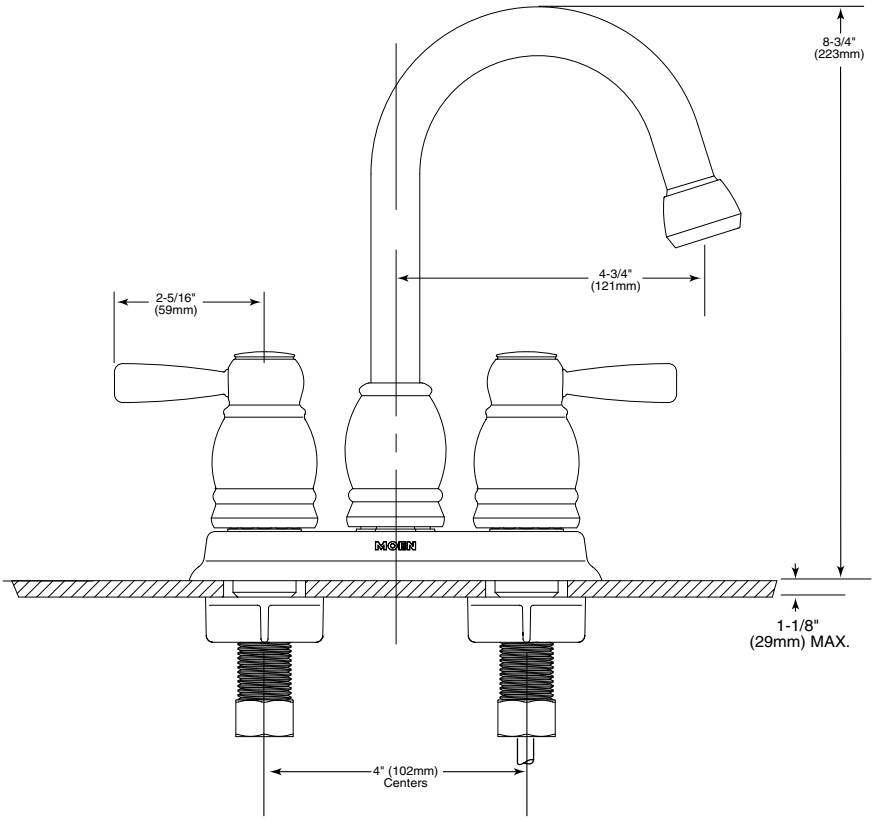

CRITICAL DIMENSIONS

(DO NOT SCALE)