



Buy it for looks. Buy it for life.®

■ Order by Part Number

There is more than 1 version of this model.
Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes hose and side spray
- Duralock™ quick connect installation
- Flexible supply lines with 3/8" compression fittings connect directly to supply stop

OPERATION

- Lever style handles
- Hot side counterclockwise to open (clockwise to close), cold side clockwise to open (counter-clockwise to close)
- Will operate with less than 5 lbs. of force

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi
- Operates in eco-performance mode by default in aerated and spray stream

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


Specifications

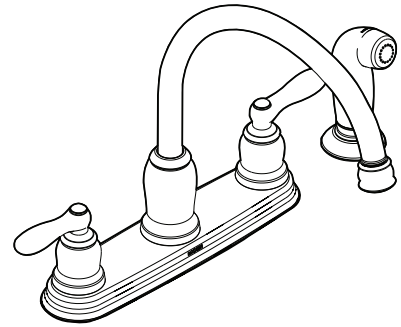

Caldwell™ Two-Handle High Arc Spout Lever Style Kitchen Faucet with Side Spray

Models: CA87888series
CA87889 (without side spray)

NOTE: This faucet is designed to be installed through 3 or 4 holes 1" Min. Dia.

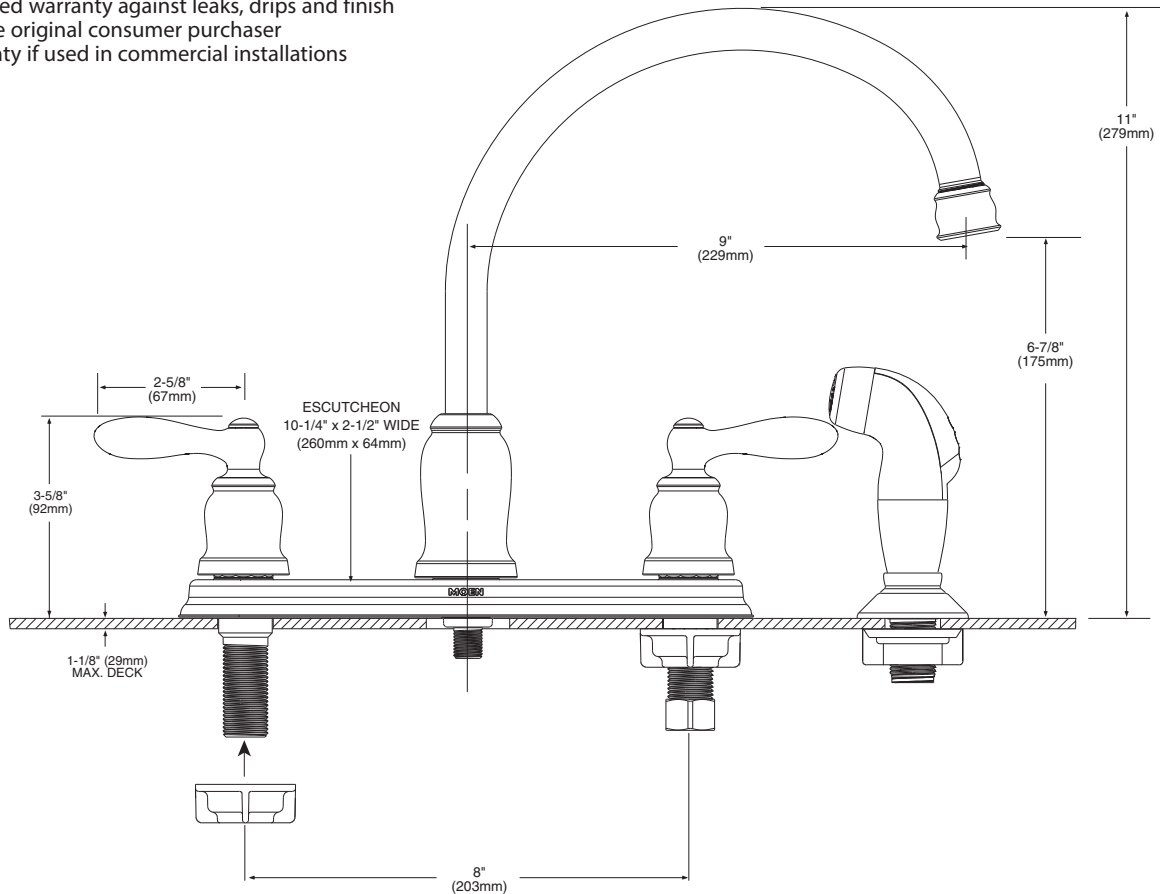

CRITICAL DIMENSIONS

(DO NOT SCALE)



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes hose and side spray

OPERATION

- Lever style handles
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)


FLOW

- Aerator is limited to 1.5 gpm max (5.7 L/min)

CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

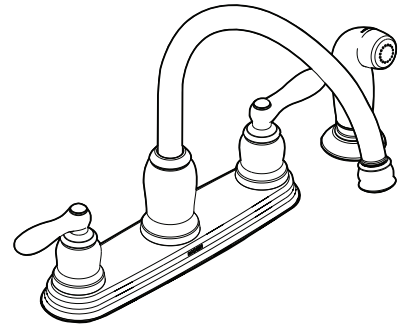

Caldwell™ Two-Handle High Arc Spout Lever Style Kitchen Faucet with Side Spray

Models: CA87888series
CA87889 (without side spray)

NOTE: This faucet is designed to be installed through 3 or 4 holes 1" Min. Dia.

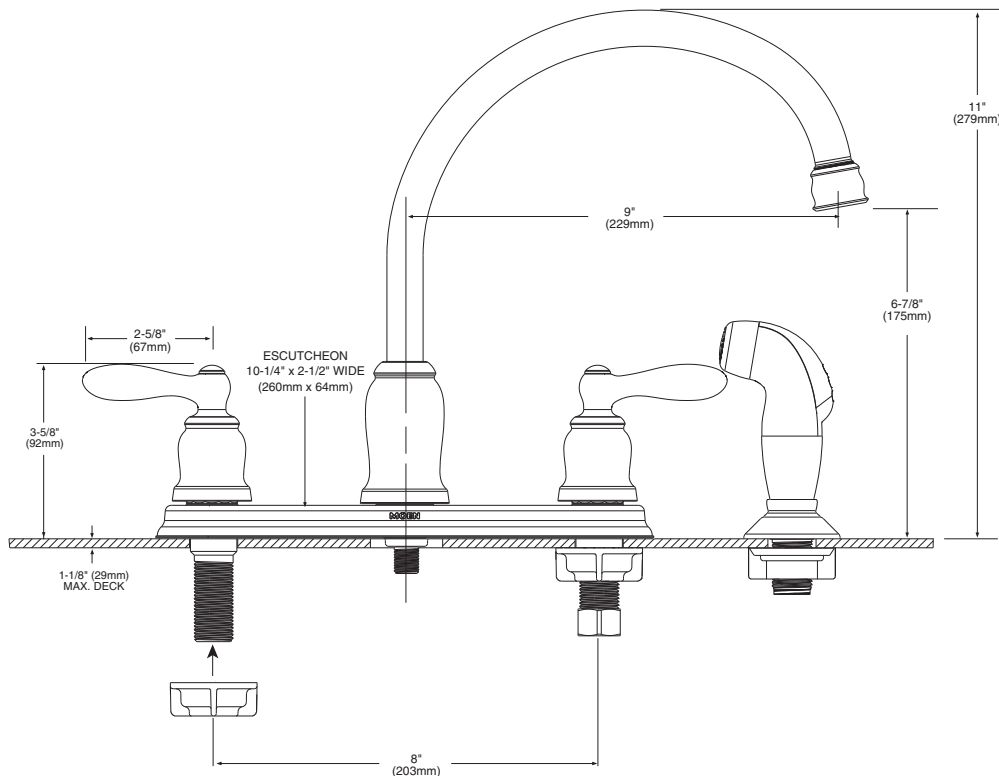

CRITICAL DIMENSIONS

(DO NOT SCALE)