SHOWHOUSE by MOEN

Specifications

DESCRIPTION
- Metal construction with chrome plated, LifeShine® brushed nickel, oil rubbed bronze, nickel or wrought iron finish
- Includes 10" rainfall showerhead, arm and flange
- Includes model 2570 1/2" CC valve

OPERATION
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°

FLOW
- Showerhead is limited to 2.5 gpm max. (9.5 L/min)

CARTRIDGE
- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS
- Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1, ASSE 1016, and all applicable requirements referenced therein

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

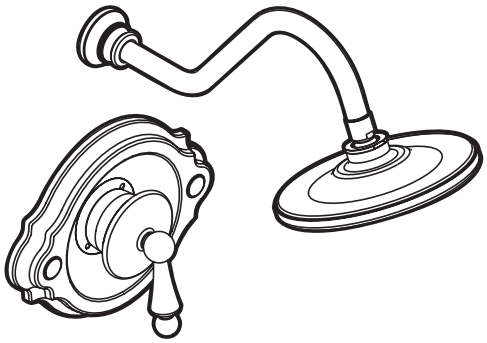

Waterhill™
Single-Handle Posi-Temp® Shower
Models: S312, S312BN, S312ORB, S312NL, S312WR

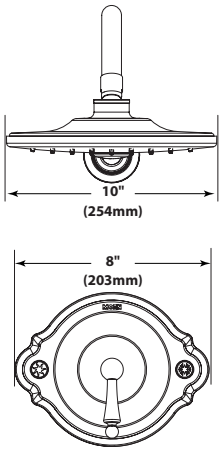

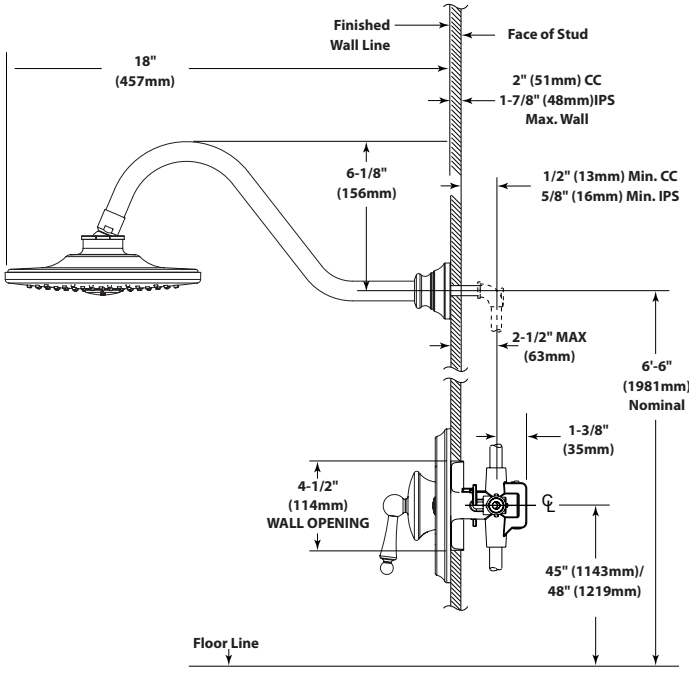

THICK WALL APPLICATION

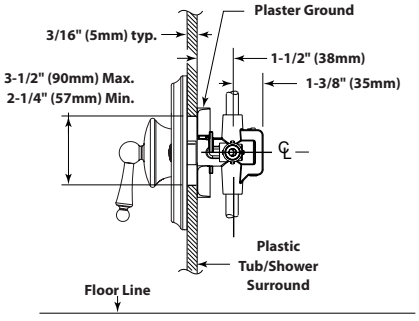

THIN WALL APPLICATION

CRITICAL DIMENSIONS
(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN
www.moen.com