



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction with chrome plated, chrome w/porcelain, LifeShine® brushed nickel, chrome w/LifeShine® polished brass accents, LifeShine® polished brass, satine or satine w/LifeShine® polished brass accents
- 1/2" IPS connections
- Includes hot (red) and cold (blue) temperature indicators

OPERATION

- Lever style handles
- Maximum handle rotation angle is 90° to full on for either handle. Rotate Hot side, counterclockwise to open (clock wise to close). Rotate Cold side, clockwise to open (counterclockwise to close)
- Includes hot (red) and cold (blue) color indicators

FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min)

CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS

- Third party certified to: CSA B-125, ASME, A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

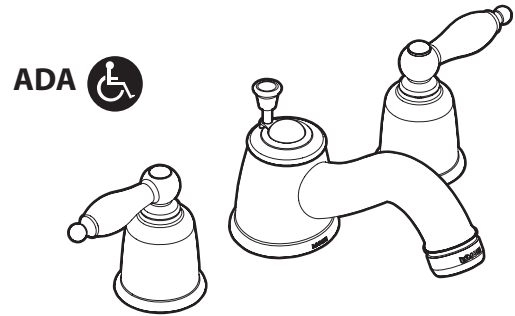

CASTLEBY™
Two-Handle Widespread
Lavatory Faucet


Models: T4965, T4965BN, T4965CP, T4965CPC, T4965ST, T4965STST

Valve: 9000, 69000

Discontinued Model: T4965P

NOTE: For deck thickness 1-3/8" - 3", use service kit # 115001. Valves install through 1-1/4" dia. hole.

NOTE: SPOUT INSTALLS THROUGH 1-1/8" MIN. DIA. HOLE. VALVES INSTALL THROUGH 1-1/8" MIN. DIA. HOLE

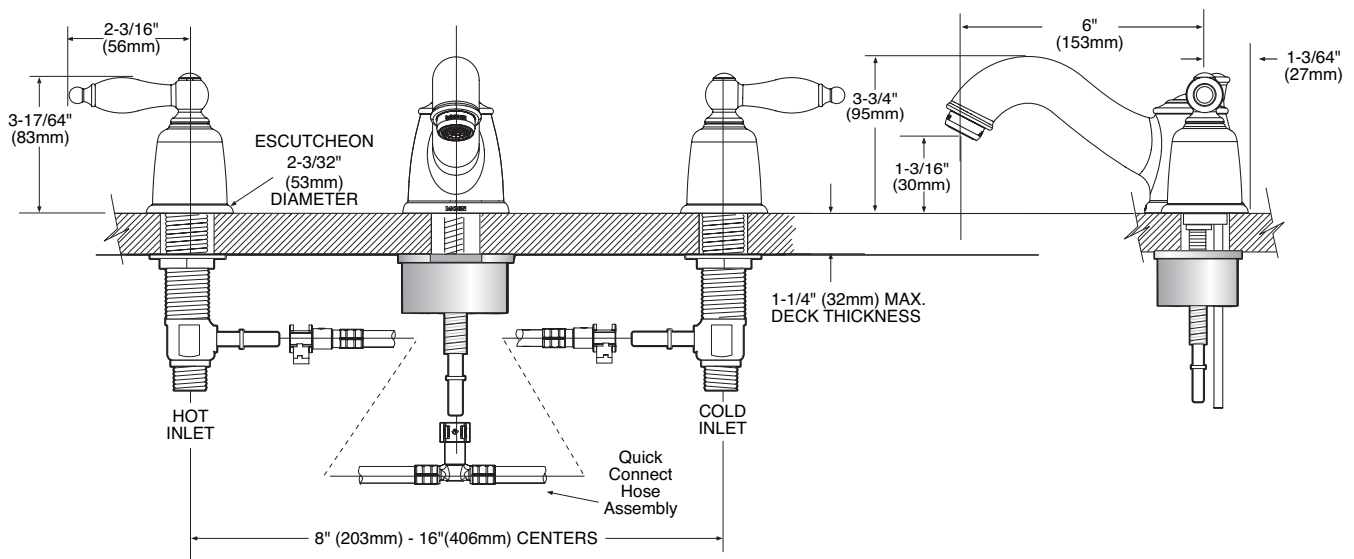

CRITICAL DIMENSIONS

(DO NOT SCALE)