



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes four single-function body sprays
- Includes single-function showerhead, arm and flange

## OPERATION

- Pull-on/push-off operation of temperature and volume, rotational control of transfer valve
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 180° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3.6^\circ\text{F}$  ( $\pm 2^\circ\text{C}$ )

## FLOW

- Showerhead limited to 2.5 gpm MAX (9.5 L/min) at 80 psi
- Body sprays limited to 1.75 gpm MAX (6.6 L/min) at 80 psi


## STANDARDS

- Third party certified by CSA to meet CSA B125.1/ASME A112.18.1

- **ADA**  for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

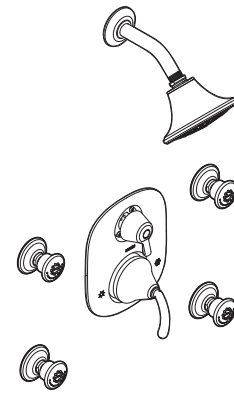


## ICON™

### Three Function Transfer Valve Spa Trim

**Models:** TS283 series

**Valves:** 3330 series  
3320 series

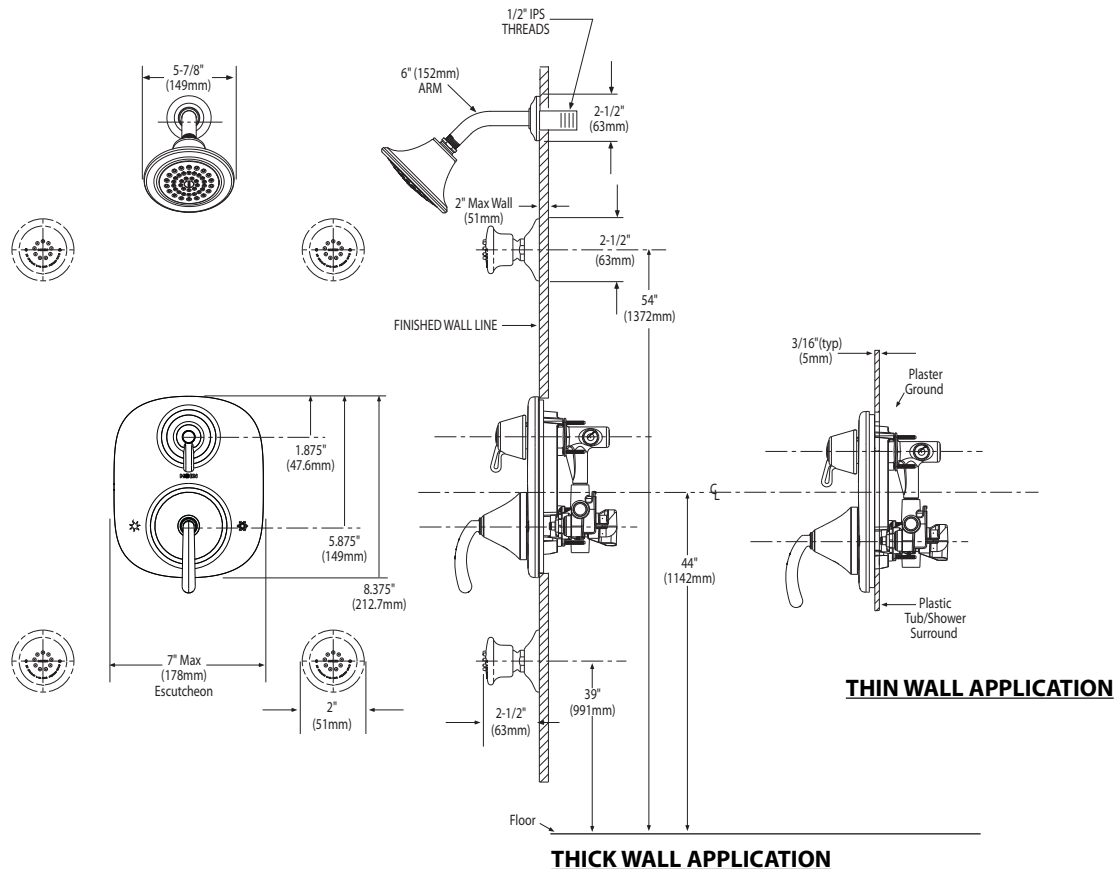

## CRITICAL DIMENSIONS

(DO NOT SCALE)