




INS1795 - 10/08

SINGLE HANDLE SINGLE MOUNT KITCHEN FAUCET

MODEL 7027V

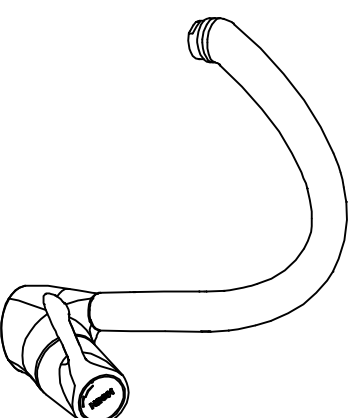

HELPFUL TOOLS



SAFETY GLASSES



TEFLON TAPE




BASIN WRENCH



PLIERS



SCREWDRIVER



FLASHLIGHT



ADJUSTABLE WRENCH




PLUMBER'S PUTTY



INS1795 - 10/08


CAUTION: Always turn water OFF before removing existing or disassembling the faucet. Open faucet handles to relieve water pressure and insure that complete water shut-off has been accomplished.

1




1. Flush water supply lines to remove any debris that has accumulated in the supply lines that could damage the faucet.

2



2. Be sure the mounting surface is dry and clean. Guide the mounting stud of the valve body(6) through the deck. Position the faucet on the mounting deck.

3



3. From below, assemble the lower deck gasket(10) and mounting nut(11) to the mounting stud(9). Tighten the mounting nut(do not overtighten). Connect the inlet supply line(purchased separately) to the mounting stud and the water supply line. Turn on water and check for leaks.

CARTRIDGE DISASSEMBLY

1. Pry out handle cap,remove handle screw and pull off the handle.
 2. Unscrew cartridge nut.
 3. Check the position of the cartridge to aid proper replacement.Remove cartridge by pulling out of faucet.
- For re-assembly,reverse the steps above.