

FAUCET DESCRIPTION

- Metal construction with chrome plated finish
- Inlet shanks will accept 3/8" ball nose connections
- 3 - 1" min. dia. holes required for trap seal primer
- Includes outlet for installing trap seal primer (trap seal primer not included)
- Includes optional garden hose adapter

OPERATION

- Mini blade style handles with hot and cold color indicators


FLOW

- Flow is 4.0 gpm (15 L/min) minimum

CARTRIDGE


- 1224 cartridge design

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- **ADA**  for lever handles

WARRANTY

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser
- 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations

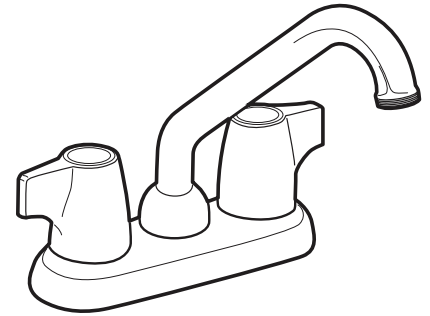

TWO HANDLE LAUNDRY FAUCET

MODEL: 4871

NOTE: DESIGNED TO BE INSTALLED THROUGH 2 - 1" MIN. DIA. HOLES 4" ON CENTER

