

# Specifications

# FAUCET DESCRIPTION

- · Metal construction with various finishes identified by suffix
- Flexible supplies with 3/8" compression fittings
- Includes side spray with Duralock<sup>™</sup> quick connect system

# OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force

#### FLOW


- Aerator is limited to 1.5 gpm max (5.7 L/min) at 60 psi max **CARTRIDGE**
- 1255 cartridge design
- Nonmetallic/nonferrous and stainless steel material

# **STANDARDS**

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ANSI/NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 🕭 for lever handles

# WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations




**Torrance**<sup>™</sup> Single-Handle Lever Kitchen Faucet

Models: 7081 series(less side spray) 7082 series(with side spray)

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 4 HOLES 1-1/4" (32MM) MIN. DIA. AND 4" (102MM) ON CENTER.



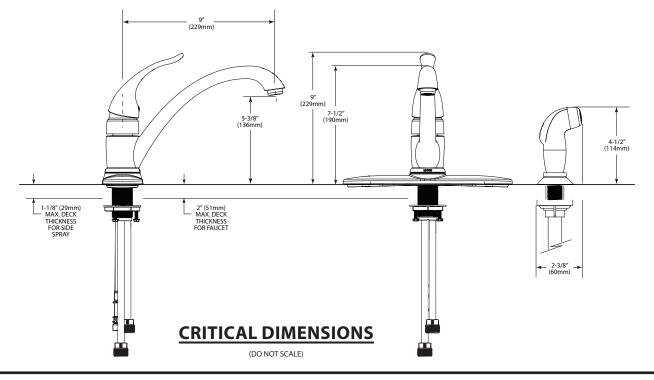

2/17

16/02/2017 SPC15162 500/02/67/10 Released 00