

# MOEN®

## Specifications

### DESCRIPTION

- Component construction with various finishes identified by suffix
- Includes rainshower, handshower and hose assembly
- 60" hose included
- Adjustable bracket

### OPERATION

- Handshower features 3.75 in. spray face and 6 settings to allow you to customize your shower and desired spray performance
- Wall bracket rotates to adjust angle of handshower
- Ability to flow each shower head separately or combined for more coverage
- Pause/trickle button allows to momentarily pause the handshower flow at a push of a button

### FLOW


- Designed to deliver 1.75gpm (7.6 L/min) max. at 80 psi

### STANDARDS

- Designed and manufactured to comply with the applicable requirements of WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein
- Meets WaterSense® criteria


### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

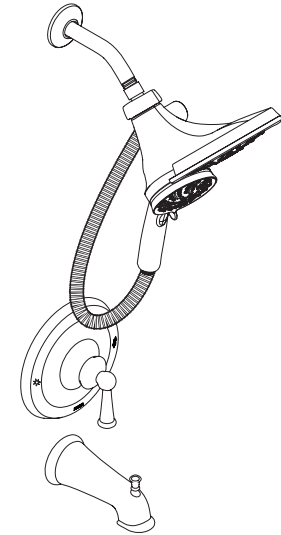

### Brecklyn™ Posi-Temp® Single Handle Tub/Shower with Magnetix™ Rainshower

**Models:** 82611 series  
82610 series (less tub spout)

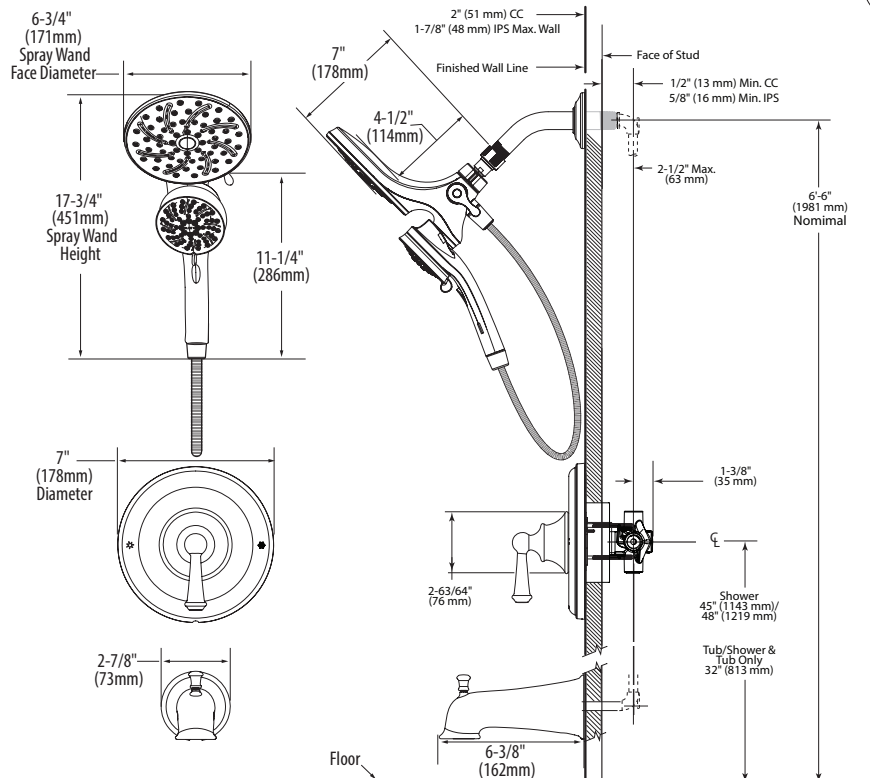

### CRITICAL DIMENSIONS

(DO NOT SCALE)