

DESCRIPTION

- Metal construction with chrome plated, LifeShine® brushed nickel, oil rubbed bronze, nickel or wrought iron finish
- For installations from 8" (203mm) to 16" (406mm) centers
- Designed to be installed on decks up to 2-1/8" (54mm)
- The tub fill spout is a slip fit design and the supplies are 1/2" type K, copper tubing
- Includes optional hot and cold temperature indicators
- Includes 9999 valve

OPERATION

- Features a pivoting spout with locking safety feature
- Lever style handles
- Rotate hot side handle counterclockwise to open and clockwise to close. Rotate cold side handle clockwise to open and counterclockwise to close

FLOW

- Spout designed to deliver 18 gpm max. at 40 psi (68 L/min)
- Hand shower meets 2.5 gpm max. (9.5 L/min)

CARTRIDGE


- 1248 cartridge design
- Non-metallic and stainless steel materials

STANDARDS

- Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

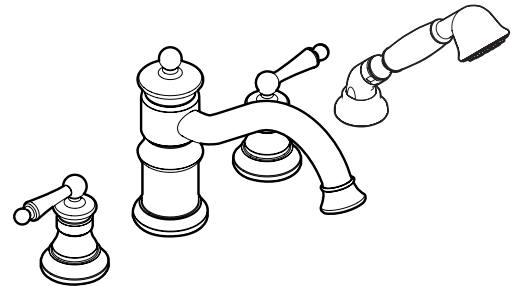

**Waterhill™
Two-Handle Roman Tub Faucet
with Integral Diverter**

**Models: S213, S213BN, S213WR,
S213NL, S213ORB**

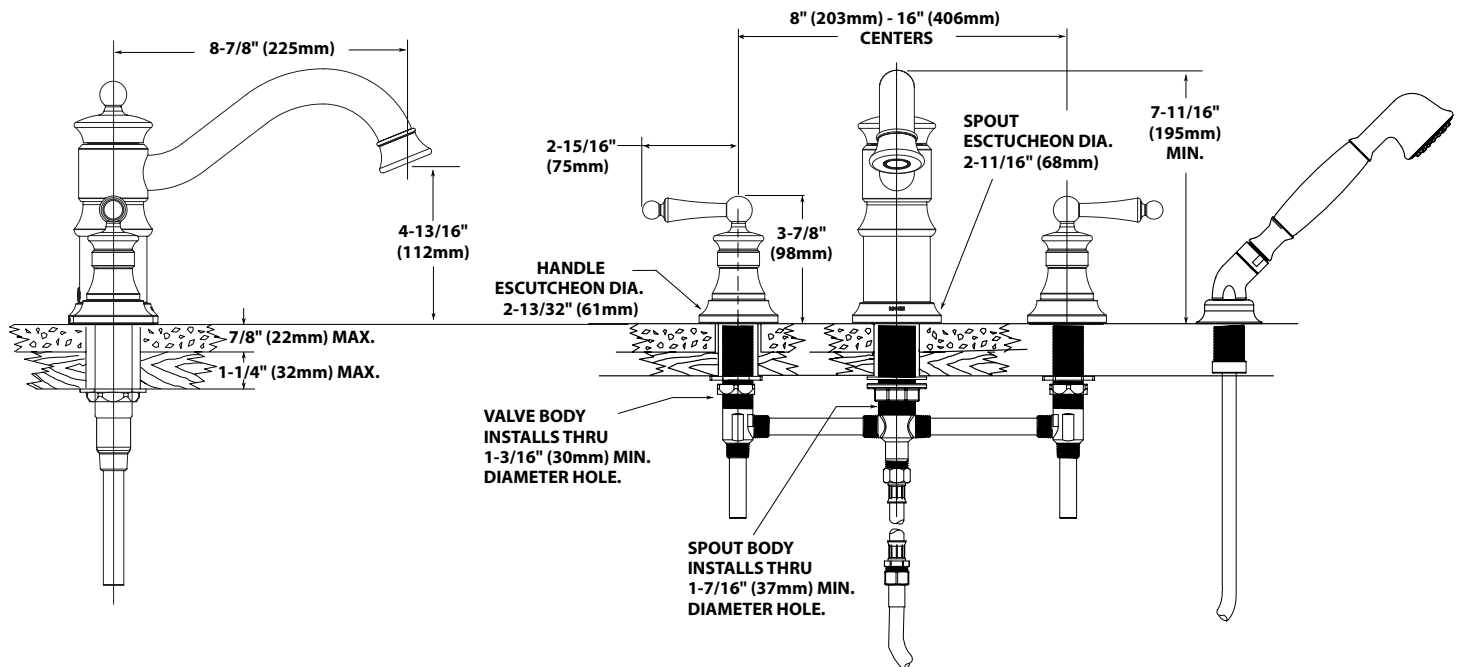

NOTE: THE INSTALLATION SHOWN IS FOR TILE DECKS, THIS VALVE WILL ALSO FIT STEEL, CAST IRON OR PLASTIC DECKS

CRITICAL DIMENSIONS
(DO NOT SCALE)