

DESCRIPTION

 Metal construction with a chrome plated, Platinum, LifeShine® Polished Brass, Satine™, Classic Gold, or Nickel finish. Ceramic construction with Pebbled Cream finish.

OPERATION


- Lever style handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature

STANDARDS

 Third party certified by CSA to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



ASCERI™ POSI-TEMP® Single-Handle Shower Valve Trim

Models: T2805, T2805CP, T2805CPM, T2805STV, T2805NLBL, T2805CGPC

NOTE: See reverse side for illustrated parts

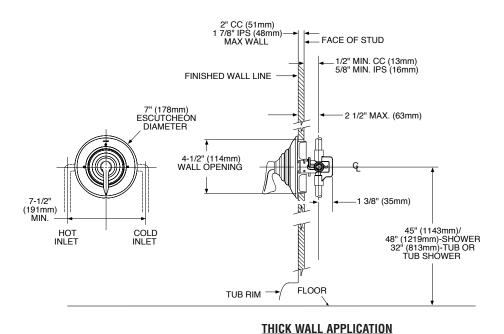

3-1/2" (89mm) MAX.
2-1/4" (57mm) MIN.
DIAMETER WALL
OPENING

PLASTIC (38mm)

OPENING

PLASTIC
TUB/SHOWER
SURROUND

THIN WALL APPLICATION

CRITICAL DIMENSIONS

(DO NOT SCALE)



ADA symbol applies to shower valve control only.