

## FAUCET DESCRIPTION

- Metal construction with chrome plated, platinum LifeShine® polished brass, copper, classic gold, Black Opal™, and Satine™ finishes
- 1/2" IPS connections
- Cross style handles (less handle inserts)
- Handle inserts include hot (red) and cold (blue) color indicators
- Includes Protégé side spray

## OPERATION

- Maximum handle rotation is 90° to full on for either handle

## FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min).

## CARTRIDGE


- 1224 cartridge design
- Nonmetallic, nonferrous and stainless steel material

## STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B-125, ASME A112.18.1M, and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1.
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

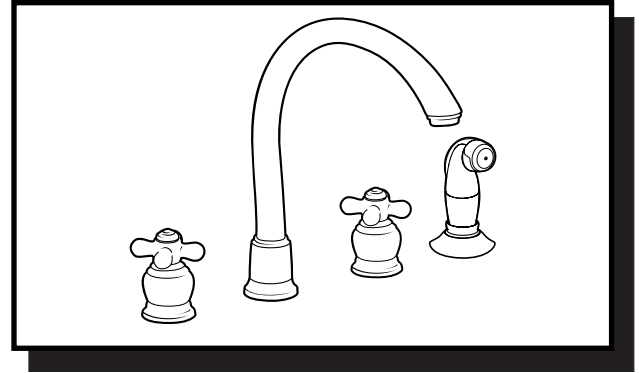


**Monticello® with Cathedral™ Spout  
Two Handle Kitchen Faucet with Protégé Side  
Spray (less handle inserts)**

**Models: 7796, 7796CP, 7796P,  
R7796CPR/A7785CPR, 7796CG/A7785CG,  
R7796PM/A7785PM, R7796BP/A7785BP,  
R7796ST/A7785ST**

**NOTE: See reverse side  
for illustrated parts**

**Spout installs through deck holes a minimum of 1-1/4"  
(32mm) in diameter.  
Valves install through 1-1/8" (28mm) min.  
diameter hole.**

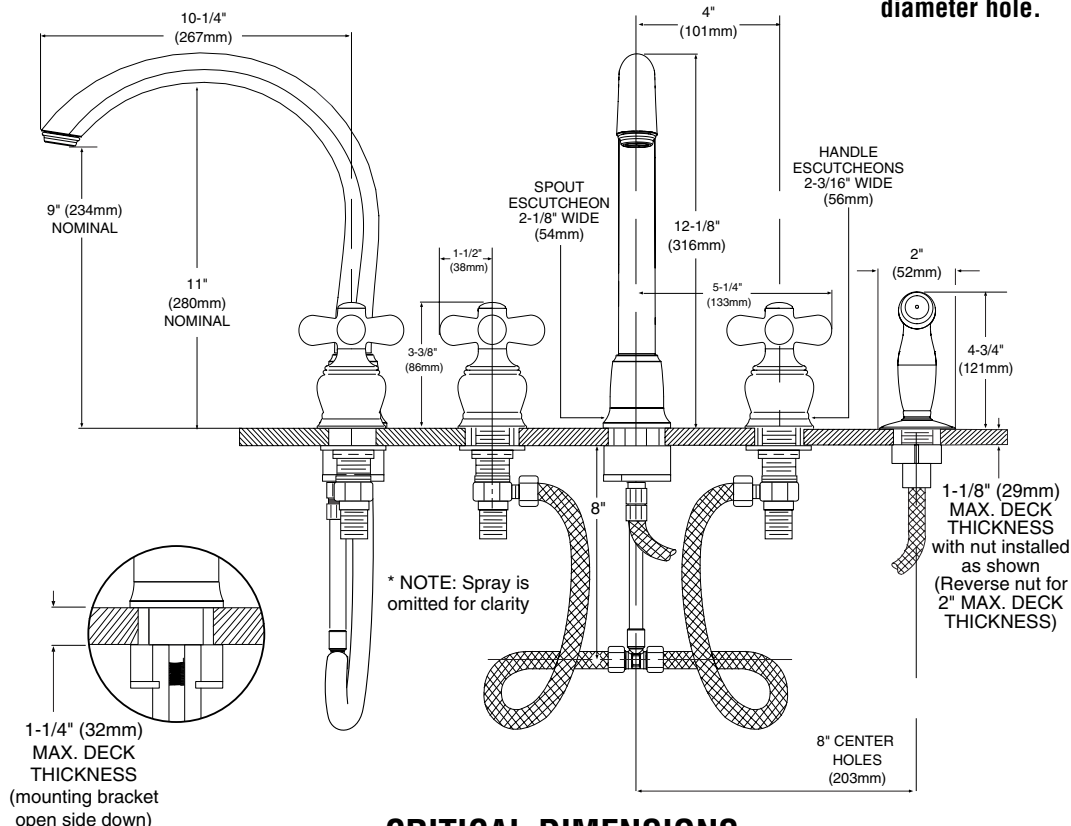

## CRITICAL DIMENSIONS

(DO NOT SCALE)